

# F-PODIUM CARBON R, CARBON/YELLOW/GREEN, 2021

obj. č: 638984766




## Technické špecifikácie

|                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>vyrábané veľkosti</b><br>S 390mm / M 420mm / L 470mm / XL 510mm                                                                                                                                                                                                                                                         | <b>hmotnosť</b><br>10,8 Kg                                                                                                                                                                                                               |
| <b>rám</b><br>F-Podium 29 Stealth Air Full Carbon, XCO Optimized Zero Suspension System, 100mm, XC Forward Geometry, Carbon Monoblock upper link, BSA bottom bracket, tapered head tube, HHG internal cable routing, dedicated 1X drivetrain design, Boost 12x148mm rear axle, shock mudguard, postmount rear brake mount. | <b>vidlica</b><br>Fox 32 29 Float FIT4 EVOL Step Cast Factory Kashima, 100mm, tapered steerer tube, 15x110mm Boost axle, remote lockout, offset 44mm. Settings: lockout, compression micro-adjustment at low-speed, rebound, air preload |
| <b>hlavové zloženie</b><br>Acros AZX-239 R1 Block Lock, ZS44/28.6 top, ZS56/40 bottom                                                                                                                                                                                                                                      | <b>prehadzovačka</b><br>Sram X01 Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1                                                                                                                                  |
| <b>radenie</b><br>Sram Trigger GX Eagle, 12s, X-Actuation 1:1                                                                                                                                                                                                                                                              | <b>brzdové páčky</b><br>Sram Level TL, Direct Link actuation, tooled reach adjust, lever pivot bushings                                                                                                                                  |
| <b>kľuky</b><br>Sram X1 Carbon Eagle, Boost, DUB axle, Direct mount chain ring, S size: 170mm, M/L/XL size: 175mm                                                                                                                                                                                                          | <b>stredové zloženie</b><br>Sram DUB BSA, sealed bearings, 73mm                                                                                                                                                                          |
| <b>riadidlá</b><br>Onoff Helium Carbon 0.2, rise: 4.8mm, width: 760mm, 9 backsweep, 0 upsweep, 31.8mm barbare Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL                                                                                                                                                               | <b>predstavec</b><br>MDK, 6061 T6 Alloy, 31.8mm barbare, rise: +/-5, length: sizes S/M: 50mm, size L: 60mm, size XL: 70mm                                                                                                                |
| <b>sedlovka</b><br>Onoff Helium Carbon 0-R, diameter 31.6mm, length 400mm                                                                                                                                                                                                                                                  | <b>sedlo</b><br>Fizik Antares R7                                                                                                                                                                                                         |
| <b>náboj predný</b><br>DT 370, Boost 15x110mm, IS 6 bolts                                                                                                                                                                                                                                                                  | <b>náboj zadný</b><br>DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts, MS freehub                                                                                                                                                      |

|                                                                                                                                                                                                       |                                                                                                                              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| <b>reťaz</b><br>Sram GX Eagle, 12s, Powerlock                                                                                                                                                         | <b>kazeta</b><br>Sram XG-1275, 10-50T, 12s                                                                                   |
| <b>drôty</b><br>DT Champion, straightpull                                                                                                                                                             | <b>ráfiky</b><br>DT Swiss XRC1750 Carbon Spline 29, 30mm internal width, hookless, tubeless ready, 28 spokes                 |
| <b>plášte</b><br>Maxxis Rekon Race 29x2.35, EXO protection, tubeless ready, 120TPI, folding bead                                                                                                      | <b>obj.c.</b><br>010.21041                                                                                                   |
| <b>tlmič</b><br>Fox Float DPS SV EVOL Factory Kashima, 185x47,5mm. Settings: 2 position remote compression (open/lock), low-speed rebound, air preload. Trunnion top mount, 22.2x10mm bottom bushings | <b>predná brzda</b><br>Sram Level TL, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad |
| <b>zadná brzda</b><br>Sram Level TL, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad                                                                           | <b>plášť zadný</b><br>Maxxis Rekon Race 29x2.35, EXO protection, tubeless ready, 120TPI, folding bead                        |
| <b>nastavenia tlmiče</b><br>Firm compression, light rebound, air volume spacer 0.2                                                                                                                    | <b>prevodník</b><br>34T, CNC-machined alloy, X-SYNC 2                                                                        |
| <b>pätka k preházozače</b><br>Sram UDH                                                                                                                                                                |                                                                                                                              |

Geometria

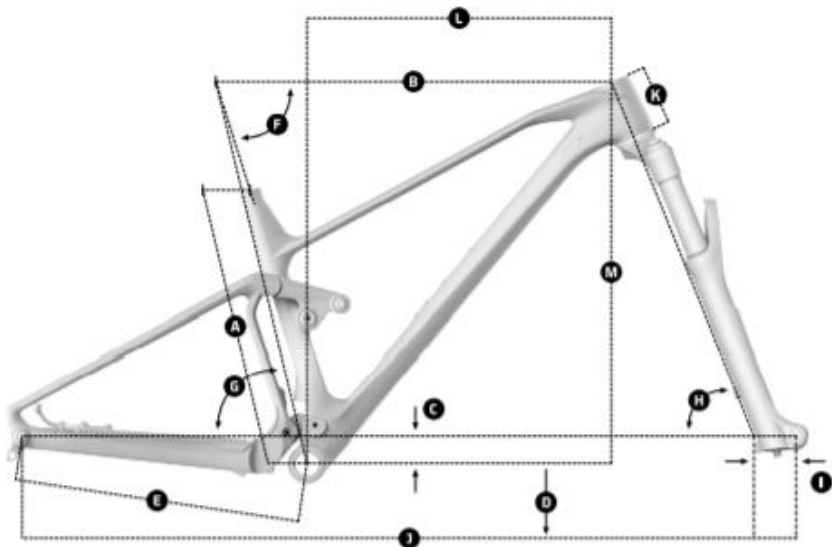

GEOMETRY

| Size                                | S       | M       | L       | XL      |
|-------------------------------------|---------|---------|---------|---------|
| <b>A</b> Seat Tube Length           | 390 mm  | 420 mm  | 470 mm  | 510 mm  |
| <b>B</b> Top Tube Length            | 580 mm  | 600mm   | 625 mm  | 650 mm  |
| <b>C</b> Bottom Bracket Drop        | -40 mm  | -40 mm  | -40 mm  | -40 mm  |
| <b>D</b> Bottom Bracket Height      | 325 mm  | 325 mm  | 325 mm  | 325 mm  |
| <b>E</b> Chainstay Legth            | 432 mm  | 432 mm  | 432 mm  | 432 mm  |
| <b>F</b> Seat Tube Angle, Actual    | 72°     | 72°     | 72°     | 72°     |
| <b>G</b> Seat Tube Angle, Effective | 76.5°   | 76.5°   | 76.5°   | 76.5°   |
| <b>H</b> Head Tube Angle            | 68°     | 68°     | 68°     | 68°     |
| <b>I</b> Fork Offset                | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| <b>J</b> Wheelbase                  | 1132 mm | 1153 mm | 1177 mm | 1203 mm |
| <b>K</b> Head Tube Length           | 85 mm   | 90 mm   | 100 mm  | 115 mm  |
| <b>L</b> Reach                      | 440 mm  | 460 mm  | 480 mm  | 500 mm  |
| <b>M</b> Stack                      | 570 mm  | 575 mm  | 584 mm  | 598 mm  |