

FOXY CARBON XR, CARBON/YELLOW, 2021

obj. č.: 638984766



Odporúčaná cena

8.499,00 EUR

Technické špecifikácie

vyrábané veľkosti

S 380mm / M 420mm / L 470mm / XL 510mm

hmotnosť

13,3 Kg

rám

Foxy 29 Stealth Air full Carbon, Zero Suspension System, 150mm travel, Forward Geometry, aluminium CSC upper link with carbon bridge, Boost 12x148mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, HHG internal cable routing, Enduro MAX sealed bearings, shock mudguard, ISCG 05, custom frame protectors. Geometry kit included: steering cups: +/- 1

vidlica

Öhlins RXF 36 M.2 29, 170mm, TTX18 Twin Tube cartridge, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload, ramp chamber

hlavové zloženie

Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45

prehadzovačka

Sram X01 Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

radenie

Sram Trigger X01 Eagle, 12s, X-Actuation 1:1

brzdové páčky

Sram G2 RSC, SwingLink and lever pivot bearings, tools-free reach and contact point adjust

kluky

Sram X01 Carbon Eagle, Boost, DUB axle, Direct mount chain ring, S/M size: 170mm, L/XL size: 175mm

stredové zloženie

Sram DUB BSA, sealed bearings, 73mm

riadidlá


Onoff Krypton Carbon 0.5, rise: 12,5mm, width: 780mm, 9 backsweep, 5 upsweep, 31,8mm barbare Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

predstavec

Onoff Krypton FG 30mm, 6061 forged alloy, 31,8mm barbare

sedlovka Onoff Pija dropper internal, diameter 31.6mm, S size: 337x100mm, M size 387x125mm, L size: 425x150mm, XL size: 465x170mm	sedlo SDG BEL-AIR 3.0, EVA foam, steel rails
náboj předný DT 240, Boost 15x110mm, IS 6 bolts	náboj zadný DT 240, Boost 12x148mm, 36T Ratchet EXP system, IS 6 bolts, XD freehub
reťaz Sram GX Eagle, 12s, Powerlock	kazeta Sram XG-1295, 10-52T, 12s
drôty DT Competition, straightpull	ráfiky DT Swiss EXC1501 Carbon Spline 29, 30mm internal width, hookless, tubeless ready, 28 spokes
plášte Maxxis Minion DHF 29x2.5 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead	obj.c. 010.21089
tlmič Öhlins TTX Air 205x62.5mm. Settings: high speed compression lever with climb mode, low-speed compression, rebound, air preload. Trunnion top mount, 22.2x10mm bottom bushings	predná brzda Sram G2 RSC, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
zadná brzda Sram G2 RSC, 4-piston caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pads	plášť zadný Maxxis Minion DHR II 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead
nastavenia tlmiče C20 compression, R35 rebound	prevodník 32T, CNC-machined alloy, X-SYNC 2
pätka k prehazovačce Mondraker M068	

Geometria

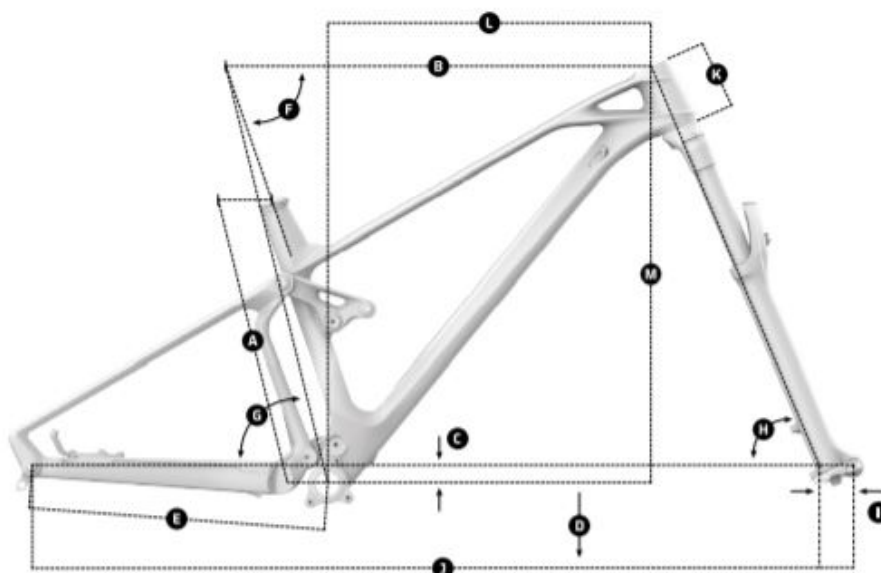

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	470 mm	510 mm
B Top Tube Length	616 mm	639 mm	664 mm	688 mm
C Bottom Bracket Drop	-14 mm	-14 mm	-14 mm	-14 mm
D Bottom Bracket Height	360 mm	360 mm	360 mm	360 mm
E Chainstay Legth	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	69.5°	69.5°	69.5°	69.5°
G Seat Tube Angle, Effective	74.5°	74.5°	74.5°	74.5°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1200 mm	1220 mm	1248 mm	1268 mm
K Head Tube Length	100 mm	110 mm	130 mm	130 mm
L Reach	440 mm	460 mm	480 mm	500 mm
M Stack	622 mm	622 mm	640 mm	640 mm