

CHASER, RED, 2021

obj. č.: 638984766



Odporúčaná cena

4.999,00 EUR

Akčná cena

4.399,99 EUR

Technické špecifikácie

vyrábané veľkosti

S 380mm / M 420mm / L 450mm / XL 490mm

hmotnosť

24,8 Kg

rám

Chaser 6061 Alloy Stealth Evo, e-Bike Optimized Zero Suspension System, 150mm travel, Forward Geometry, internal removable battery, Boost 12x148mm rear axle, tapered head tube, one-piece Monoblock upper link, HHG internal cable routing, MAX capacity sealed bearings, oversize 17mm axles, integrated dropout speed sensor, exclusive plastic motor covers, shock mudguard

vidlica

RockShox 35 Silver TK 29, 160mm, TurnKey, Solo Air, tapered steerer tube, Boost 15x110mm axle, 35mm steel stanchions, 44mm offset. Settings: compression adjustment at low-speed to lock, rebound, air preload

hlavové zloženie

Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45

prehadzovačka

Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1

radenie

Sram Trigger SX Eagle, 12s, X-Actuation 1:1, single click

brzdové páčky

Sram G2 R, tool-free reach adjust

kluky

Race Face Aeffect ebike, 165mm

riadidlá

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbare Onoff Twin, 1lock-on, 135mm

predstavec


Onoff Sulfur FG 30mm 0, 6061 forged alloy, 31.8mm barbare

sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 387x125mm, M size: 425x150mm, L/XL size: 465x170mm

sedlo Mondraker e-MTB custom design	náboj předný Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts
náboj zadný Formula EHL148 Boost 12x148mm, sealed bearings, IS 6 bolts	reťaz Sram SX Eagle, 12s, Powerlock
kazeta Sram PG-1210, 11-50T, 12s	drôty CN round stainless steel
ráfiky MDK-HP1 29, 30mm internal width, tubeless ready, 32 spokes	plášte Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead
obj.c. 010.21233	tlmič RockShox Deluxe Select R Debonair, 205x65mm. Settings: Low-speed rebound, air preload. Trunnion top mount, 25x10mm bottom bushings
predná brzda Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads	zadná brzda Sram G2 R, 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed organic pads
plášť zadný Maxxis Rekon 29x2.6, tubeless ready, dual compound, EXO protection, 60TPI, folding bead	nastavenia tlmiče Light compression, Light rebound, 1 Token
prevodník Sram X-Sync 2 Eagle 34T, steel, narrow-wide, 104 BCD	pätka k prehazovačce Mondraker M068
motor + batérie Bosch Performance Line CX Cruise (25Km/h) GEN4, computer Bosch Purion, Bosch Powertube 625Wh	

Geometria

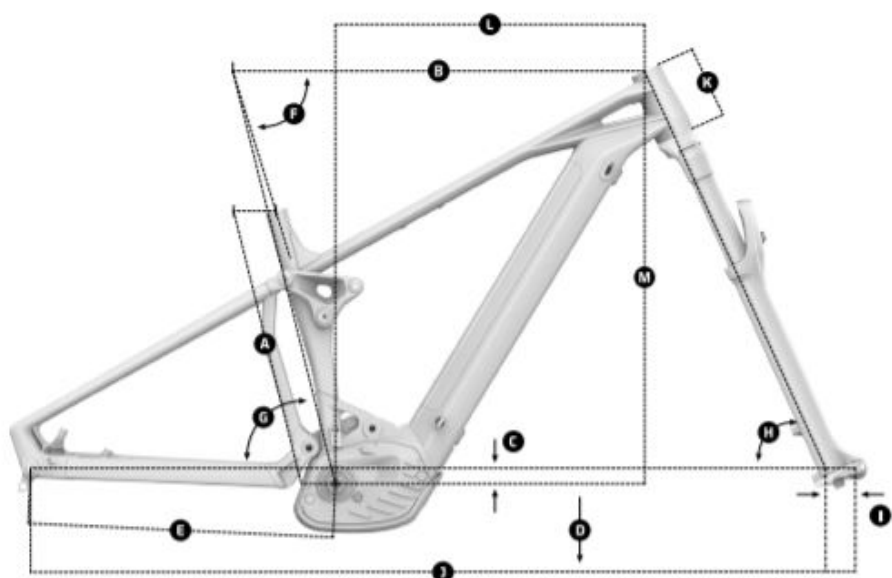

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	380 mm	420 mm	450 mm	490 mm
B Top Tube Length	605 mm	625 mm	650 mm	670 mm
C Bottom Bracket Drop	-25 mm	-25 mm	-25 mm	-25 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Length	455 mm	455 mm	455 mm	455 mm
F Seat Tube Angle, Actual	73.5°	73.5°	73.5°	73.5°
G Seat Tube Angle, Effective	76°	76°	76°	76°
H Head Tube Angle	65.5°	65.5°	65.5°	65.5°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1225 mm	1245 mm	1265 mm	1285 mm
K Head Tube Length	110 mm	110 mm	130 mm	130 mm
L Reach	450 mm	470 mm	490 mm	510 mm
M Stack	622 mm	622 mm	640 mm	640 mm