

# SUPERFOXY R, SILVER/BLACK/RED, 2021

obj. č.: 638984766



Odporúčaná cena

**4.599,00 EUR**

## Technické špecifikácie

### vyrábané veľkosti

S 380mm / M 420mm / L 470mm / XL 510mm

### hmotnosť

15,8 Kg

### rám

SuperFoxy 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 160mm travel, Forward Geometry, one piece Monoblock upper link, SuperBoost 12x157mm rear axle, tapered head tube, 73mm BSA bottom bracket, dedicated 1x drivetrain design, telescopic seatpost internal routing, Max. capacity sealed bearings, ISCG 05

### vidlica

Fox 38 29 Float FIT GRIP EVOL Performance, 170mm, tapered steerer tube, Boost 15x110mm axle, offset 44mm. Settings: 3 positions with micro adjust compression, low-speed rebound, air preload

### hlavové zloženie

Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45

### prehadzovačka

Sram GX Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

### radenie

Sram Trigger GX Eagle, 12s, X-Actuation 1:1

### brzdové páčky

Sram Code R, tool-free reach adjust

### kluky

Truvativ Descendant 7K Eagle, SuperBoost, DUB axle, Direct mount chain ring, S/M size 170mm, L/XL size 175mm

### stredové zloženie

Sram DUB BSA, sealed bearings, 73mm

### riadidlá

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm barbore Onoff Twin, 1lock-on, 135mm

### predstavec

Onoff Sulfur FG 30mm 0°, 6061 forged alloy, 31.8mm barbore

### sedlovka

Onoff Pija dropper internal, diameter 31.6mm, S size: 337x100mm, M size 387x125mm, L size: 425x150mm, XL size: 465x170mm

### sedlo

SDG BEL-AIR 3.0, LPU foam, steel rails

**náboj předný**

DT 370, Boost 15x110mm, IS 6 bolts

**náboj zadný**

DT 370, SuperBoost 12x157mm, 3 Pawl system, IS 6 bolts, XD freehub

**reřaz**

Sram NX Eagle, 12s, Powerlock

**kazeta**

Sram XG-1275, 10-52T, 12s

**drůty**

DT Champion, straightpull

**ráfiky**

DT Swiss E1900 Spline 29, 30mm internal width, sleeved aluminum, tubeless ready, 28 spokes

**plášte**

Maxxis Minion DHF 29x2.5 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead

**obj.c.**

010.21097

**tlmič**

Fox Float X2 EVOL Performance, 205x65mm. Settings: Open/Firm, low-speed compression, low-speed rebound, air preload. Trunnion top mount, 22.2x10mm bottom bushings

**predná brzda**

Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

**zadná brzda**

Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads

**plášř zadný**

Maxxis Minion DHR II 29x2.4 WT, tubeless ready, 3C MAXX TERRA compound, EXO+ protection, 120TPI, folding bead

**nastavenia tlmiče**

Medium compression, medium rebound, air volume


**prevodník**

32T, CNC-machined alloy, X-SYNC 2

**pätka k přehazovačce**

Mondraker M068

**Geometria**

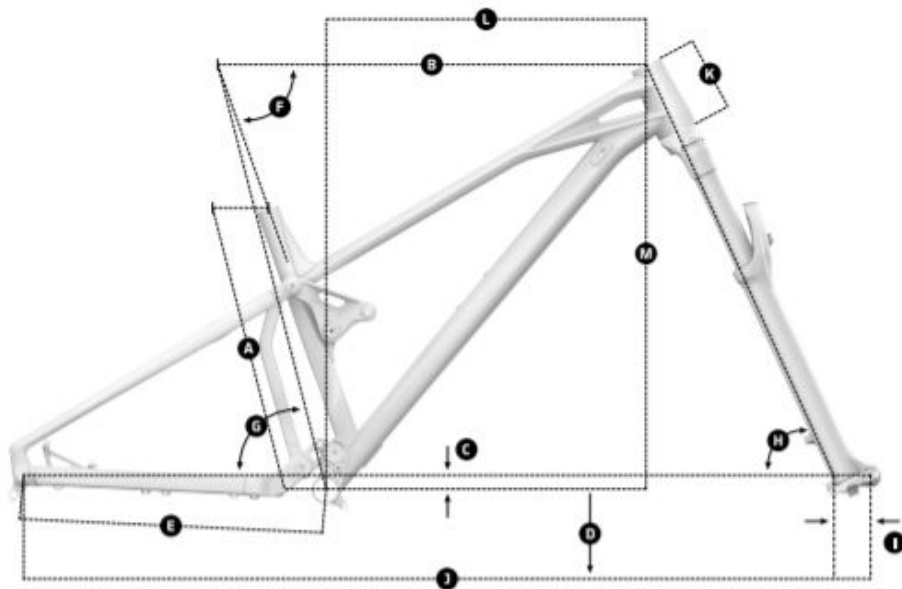

## GEOMETRY

Size	S	M	L	XL
<b>A</b> Seat Tube Length	380 mm	420 mm	470 mm	510 mm
<b>B</b> Top Tube Length	605 mm	625 mm	650 mm	670 mm
<b>C</b> Bottom Bracket Drop	-20 mm	-20 mm	-20 mm	-20
<b>D</b> Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
<b>E</b> Chainstay Legth	445 mm	445 mm	445 mm	445 mm
<b>F</b> Seat Tube Angle, Actual	71°	71°	71°	71°
<b>G</b> Seat Tube Angle, Effective	76°	76°	76°	76°
<b>H</b> Head Tube Angle	65°	65°	65°	65°
<b>I</b> Fork Offset	44 mm	44 mm	44 mm	44 mm
<b>J</b> Wheelbase	1224 mm	1245 mm	1273 mm	1293 mm
<b>K</b> Head Tube Length	100 mm	110 mm	130 mm	130 mm
<b>L</b> Reach	450 mm	470 mm	490 mm	510 mm
<b>M</b> Stack	621 mm	621 mm	639 mm	639 mm