

# F-PODIUM DC CARBON R, GREEN/CARBON/YELLOW, 2021

obj. č: 638984766



Odporúčaná cena

**6.799,00 EUR**

## Technické špecifikácie

### vyrábané veľkosti

S 390mm / M 420mm / L 470mm / XL 510mm

### hmotnosť

11,7 Kg

### rám

F-Podium 29 Stealth Air Full Carbon, XCO Optimized Zero Suspension System, 100mm, XC Forward Geometry, Carbon Monoblock upper link, BSA bottom bracket, tapered head tube, HHG internal cable routing, dedicated 1X drivetrain design, Boost 12x148mm rear axle, shock mudguard, postmount rear brake mount.

### vidlica

Fox 34 29 Float FIT4 EVOL Step Cast Factory Kashima, 120mm, tapered steerer tube, 15x110mm Boost axle, offset 44mm. Settings: remote lockout, compression micro-adjustment at low-speed, rebound, air preload

### hlavové zloženie

Acros AZX-239 R1 Block Lock, ZS44/28.6 top, ZS56/40 bottom

### prehadzovačka

Sram X01 Eagle, Type 3 roller bearing clutch, cage lock, 1x12s, X-Actuation 1:1

### radenie

Sram Trigger GX Eagle, 12s, X-Actuation 1:1

### brzdové páčky

Sram Level TL, Direct Link actuation, tooled reach adjust, lever pivot bushings

### kľuky

Sram X1 Carbon Eagle, Boost, DUB axle, Direct mount chain ring, S size: 170mm, M/L/XL size: 175mm

### stredové zloženie

Sram DUB BSA, sealed bearings, 73mm

### riadidlá

Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 760mm, 9 backsweep, 0 upsweep, 31.8mm barbare Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

### predstavec

MDK, 6061 T6 Alloy, 31.8mm barbare, rise: +/-5, length: sizes S/M: 50mm, size L: 60mm, size XL: 70mm

### sedlovka


Onoff Pija dropper internal, diameter 31.6mm, S size: 337x100mm, M/L/XL size 387x125mm

### sedlo

Fizik Antares R7

|                                                                                                                                                                                                       |                                                                                                                              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| <b>náboj předný</b><br>DT 370, Boost 15x110mm, IS 6 bolts                                                                                                                                             | <b>náboj zadný</b><br>DT 370, Boost 12x148mm, 3 Pawl system, IS 6 bolts, MS freehub                                          |
| <b>reťaz</b><br>Sram GX Eagle, 12s, Powerlock                                                                                                                                                         | <b>kazeta</b><br>Sram XG-1275, 10-50T, 12s                                                                                   |
| <b>drôty</b><br>DT Champion, straightpull                                                                                                                                                             | <b>ráfiky</b><br>DT Swiss XRC1750 Carbon Spline 29, 30mm internal width, hookless, tubeless ready, 28 spokes                 |
| <b>plášte</b><br>Maxxis Rekon Race 29x2.35, EXO protection, tubeless ready, 120TPI, folding bead                                                                                                      | <b>obj.c.</b><br>010.21053                                                                                                   |
| <b>tlmič</b><br>Fox Float DPS SV EVOL Factory Kashima, 185x47,5mm. Settings: 2 position remote compression (open/lock), low-speed rebound, air preload. Trunnion top mount, 22.2x10mm bottom bushings | <b>predná brzda</b><br>Sram Level TL, 2 piece caliper, Centerline 180mm IS 6 bolts one-piece rotor, steel-backed organic pad |
| <b>zadná brzda</b><br>Sram Level TL, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad                                                                           | <b>plášť zadný</b><br>Maxxis Rekon Race 29x2.35, EXO protection, tubeless ready, 120TPI, folding bead                        |
| <b>nastavenia tlmiče</b><br>Firm compression, light rebound, air volume spacer 0.2                                                                                                                    | <b>prevodník</b><br>34T, CNC-machined alloy, X-SYNC 2                                                                        |
| <b>pätka k prehazovačce</b><br>Sram UDH                                                                                                                                                               |                                                                                                                              |

Geometria

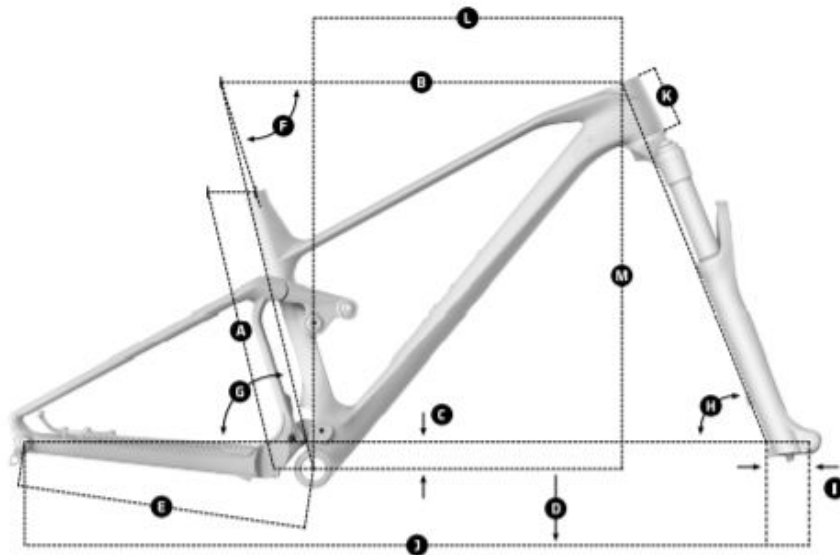

## GEOMETRY

| Size                                | S       | M       | L       | XL      |
|-------------------------------------|---------|---------|---------|---------|
| <b>A</b> Seat Tube Length           | 390 mm  | 420 mm  | 470 mm  | 510 mm  |
| <b>B</b> Top Tube Length            | 583 mm  | 603 mm  | 629 mm  | 654 mm  |
| <b>C</b> Bottom Bracket Drop        | -31 mm  | -31 mm  | -31 mm  | -31 mm  |
| <b>D</b> Bottom Bracket Height      | 337 mm  | 337 mm  | 337 mm  | 337 mm  |
| <b>E</b> Chainstay Legth            | 432 mm  | 432 mm  | 432 mm  | 432 mm  |
| <b>F</b> Seat Tube Angle, Actual    | 70.8°   | 70.8°   | 70.8°   | 70.8°   |
| <b>G</b> Seat Tube Angle, Effective | 75.1°   | 75.1°   | 75.1°   | 75.1°   |
| <b>H</b> Head Tube Angle            | 66.8°   | 66.8°   | 66.8°   | 66.8°   |
| <b>I</b> Fork Offset                | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| <b>J</b> Wheelbase                  | 1146 mm | 1167 mm | 1191 mm | 1217 mm |
| <b>K</b> Head Tube Length           | 85 mm   | 90 mm   | 100 mm  | 115 mm  |
| <b>L</b> Reach                      | 430 mm  | 450 mm  | 470 mm  | 490 mm  |
| <b>M</b> Stack                      | 577mm   | 582mm   | 591 mm  | 605mm   |