

# CHRONO CARBON, CARBON/ORANGE/GREY, 2021

obj. č.: 638984766



Odporúčaná cena

**2.099,00 EUR**

Akčná cena

**1.975,99 EUR**

## Technické špecifikácie

### vyrábané veľkosti

S 395mm / M 430mm / L 470mm / XL 520mm

### hmotnosť

11,3 Kg

### rám

Chrono 29 Stealth full Carbon, XC Forward Geometry, 73mm BSA bottom bracket, tapered head tube, HHG Internal Cable routing, Boost 12x148mm rear axle, Comfort Flat chainstays (Flatstays) design

### vidlica

RockShox Judy Gold RL 29, 100mm, Motion control, Solo Air, tapered steerer tube, Boost 15x110mm axle, 30mm aluminum stanchions, offset 51mm. Settings: Onelock 2 pos remote compression (open/lock), rebound, air preload

### hlavové zloženie

Onoff Titan tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41.8x30.5x8x45x45, bottom 51.9x40x8x45x45

### prehadzovačka

Sram NX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1

### radenie

Sram Trigger SX Eagle, 12s, X-Actuation 1:1

### brzdové páčky

Sram Level, tooled reach adjust, lever pivot bushings

### kluky

Sram SX Eagle, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm

### stredové zloženie

Sram DUB BSA, sealed bearings, 73mm

### riadidlá


Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbare Onoff Twin, 1lock-on, 135mm

### predstavec

MDK, 6061 T6 Alloy, 31.8mm barbare, rise: +/-5, length: size S: 60mm, size M: 70mm, size L: 80mm, size XL: 90mm

|                                                                                                                           |                                                                                                                          |
|---------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <b>sedlovka</b><br>Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm                              | <b>sedlo</b><br>Mondraker XC Series, steel rail                                                                          |
| <b>náboj předný</b><br>Formula DC711, Boost 15x110mm, sealed bearings, IS 6 bolts                                         | <b>náboj zadný</b><br>Formula MST148S-4SB, Boost 12x148mm, sealed bearings, IS 6 bolts                                   |
| <b>reťaz</b><br>Sram SX Eagle, 12s, Powerlock                                                                             | <b>kazeta</b><br>Sram PG-1230, 11-50T, 12s                                                                               |
| <b>drôty</b><br>CN round stainless steel                                                                                  | <b>ráfiky</b><br>MDK-XP1 29 TLR, 25mm internal width, tubeless ready, 32 spokes                                          |
| <b>plášte</b><br>Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead                         | <b>obj.c.</b><br>010.21013                                                                                               |
| <b>predná brzda</b><br>Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad | <b>zadná brzda</b><br>Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad |
| <b>plášť zadný</b><br>Maxxis Ikon 29x2.20, 3CMaxx Speed compound, tubeless ready, 120TPI, folding bead                    | <b>prevodník</b><br>34T, steel, X-Sync 2                                                                                 |
| <b>pätka k přehazovačce</b><br>Mondraker M068                                                                             |                                                                                                                          |

Geometria

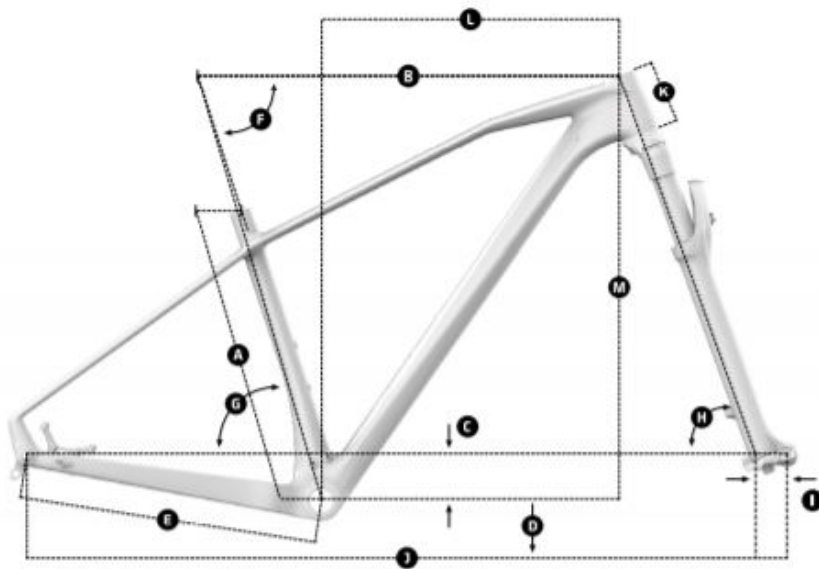

## GEOMETRY

| Size                                | S       | M       | L       | XL      |
|-------------------------------------|---------|---------|---------|---------|
| <b>A</b> Seat Tube Length           | 395 mm  | 430 mm  | 470 mm  | 520 mm  |
| <b>B</b> Top Tube Length            | 590 mm  | 610 mm  | 630 mm  | 650 mm  |
| <b>C</b> Bottom Bracket Drop        | -65 mm  | -65 mm  | -65 mm  | -65 mm  |
| <b>D</b> Bottom Bracket Height      | 305 mm  | 305 mm  | 305 mm  | 305 mm  |
| <b>E</b> Chainstay Legth            | 430 mm  | 430 mm  | 430 mm  | 430 mm  |
| <b>F</b> Seat Tube Angle, Actual    | 72°     | 72°     | 72°     | 72°     |
| <b>G</b> Seat Tube Angle, Effective | 73.5°   | 73.5°   | 73.5°   | 73.5°   |
| <b>H</b> Head Tube Angle            | 70°     | 70°     | 70°     | 70°     |
| <b>I</b> Fork Offset                | 44 mm   | 44 mm   | 44 mm   | 44 mm   |
| <b>J</b> Wheelbase                  | 1086 mm | 1106 mm | 1127 mm | 1148 mm |
| <b>K</b> Head Tube Length           | 85 mm   | 90 mm   | 100 mm  | 115 mm  |
| <b>L</b> Reach                      | 411 mm  | 430 mm  | 447 mm  | 463 mm  |
| <b>M</b> Stack                      | 605 mm  | 610 mm  | 619 mm  | 632 mm  |