

FACTOR 26, SILVER/RED/BLACK, 2021

obj. č.: 638984766



Odporúčaná cena

1.999,00 EUR

Technické špecifikácie

vyrábané veľkosti

One size 350mm

hmotnosť

13,6 Kg

rám

Factor 26 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 120mm travel, one piece bolt-on upper link, QR 9mm rear axle, 73mm BSA bottom bracket, HHG internal cable routing, dedicated 1x drivetrain design

vidlica

X-Fusion Velvet RL2 26, 120mm, Motion control, air spring, tapered steerer tube, 9x100mm axle, 32mm aluminum stanchions, 41mm offset. Settings: lockout, rebound, air preload

hlavové zloženie

Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45

prehadzovačka

Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1

radenie

Sram Trigger SX Eagle, 12s, X-Actuation 1:1

brzdové páčky

Shimano M4100, alloy lever, tooled reach adjust

kluky

Sram SX Eagle, DUB axle, Direct mount chain ring, 155mm

stredové zloženie

Sram DUB BSA, sealed bearings, 73mm

riadidlá

SDG Slater, double butted 6061 alloy, rise: 20mm, width: 650mm, 5 backsweep, 8 upsweep, 31.8mm barbore with 4x19mm shims SDG Slater JR D19mm, 115mm

predstavec

Onoff Sulfur FG 30mm 0, 6061 forged alloy, 31.8mm barbore

sedlovka


Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 31.6mm, length 400mm

sedlo

SDG Fly JR

náboj předný Formula DC20LW, 9x100mm, cup cone ball bearings, IS 6 bolts	náboj zadný Formula DC22LW 9x135mm, cup cone ball bearings, IS 6 bolts
reťaz Sram SX Eagle, 12s, Powerlock	kazeta Sram PG-1230, 11-50T, 12s
drôty CN round stainless steel	ráfiky MDK-XP1 26 TLR, 23mm internal width, tubeless ready, 32 spokes
plášte Kenda Booster 26x2.4 single compound 30TPI, wire bead	obj.c. 010.21127
tlmič X-Fusion 02PRO R, 210x55mm. Settings: low-speed rebound, air preload. 45x8mm top and bottom bushings	predná brzda Shimano M410, RT56 160mm IS 6 bolts rotor, resin pads
zadná brzda Shimano M410, RT56 160mm IS 6 bolts rotor, resin pads	plášť zadný Kenda Booster 26x2.4 single compound 30TPI, wire bead
nastavenia tlmiče A-Tune light compression	prevodník 30T, steel, X-Sync
pätka k prehadzovačke Mondraker M073	

Geometria

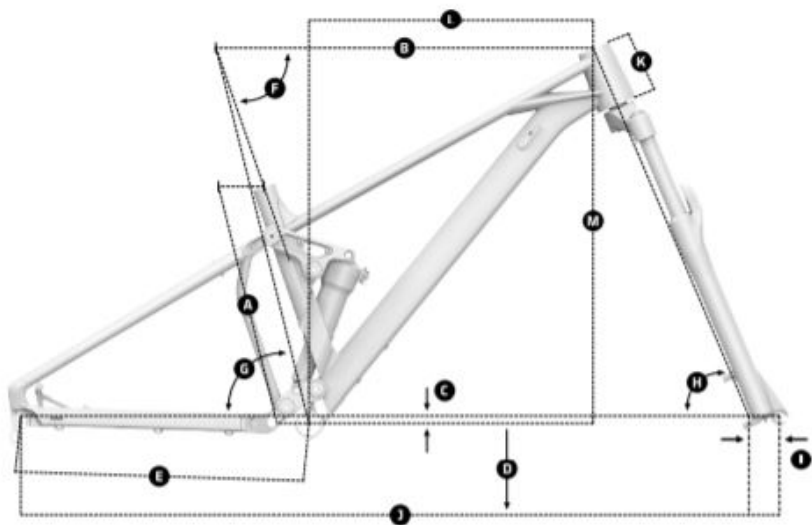

GEOMETRY

Size	26"
------	-----

A	Seat Tube Length	350mm
B	Top Tube Length	550mm
C	Bottom Bracket Drop	-10 mm
D	Bottom Bracket Height	320 mm
E	Chainstay Legth	420 mm
F	Seat Tube Angle, Actual	71°
G	Seat Tube Angle, Effective	76°
H	Head Tube Angle	67°
I	Fork Offset	41 mm
J	Wheelbase	1105 mm
K	Head Tube Length	90 mm
L	Reach	415 mm
M	Stack	545 mm