

# FACTOR 26, SILVER/RED/BLACK, 2021

obj. č.: 638984766



Odporúčaná cena

**1.999,00 EUR**

Akčná cena


**1.999,00 EUR**

## Technické špecifikácie

|                                                                                                                                                                                                                                               |                                                                                                                                                                                                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>vyrábané veľkosti</b><br>One size 350mm                                                                                                                                                                                                    | <b>hmotnosť</b><br>13,6 Kg                                                                                                                                                                      |
| <b>rám</b><br>Factor 26 6061 Alloy Stealth Evo, hydroformed tubing, Zero Suspension System, 120mm travel, one piece bolt-on upper link, QR 9mm rear axle, 73mm BSA bottom bracket, HHG internal cable routing, dedicated 1x drivetrain design | <b>vidlica</b><br>X-Fusion Velvet RL2 26, 120mm, Motion control, air spring, tapered steerer tube, 9x100mm axle, 32mm aluminum stanchions, 41mm offset. Settings: lockout, rebound, air preload |
| <b>hlavové zloženie</b><br>Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45                                                                                                | <b>prehadzovačka</b><br>Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1                                                                               |
| <b>radenie</b><br>Sram Trigger SX Eagle, 12s, X-Actuation 1:1                                                                                                                                                                                 | <b>brzdové páčky</b><br>Shimano M4100, alloy lever, tooled reach adjust                                                                                                                         |
| <b>kluky</b><br>Sram SX Eagle, DUB axle, Direct mount chain ring, 155mm                                                                                                                                                                       | <b>stredové zloženie</b><br>Sram DUB BSA, sealed bearings, 73mm                                                                                                                                 |
| <b>riadidlá</b><br>SDG Slater, double butted 6061 alloy, rise: 20mm, width: 650mm, 5 backsweep, 8 upsweep, 31.8mm barbore with 4x19mm shims SDG Slater JR D19mm, 115mm                                                                        | <b>predstavec</b><br>Onoff Sulfur FG 30mm 0, 6061 forged alloy, 31.8mm barbore                                                                                                                  |
| <b>sedlovka</b><br>Onoff Sulfur 0-R, 6061 T6 Alloy, 3D forged, diameter 31.6mm, length 400mm                                                                                                                                                  | <b>sedlo</b><br>SDG Fly JR                                                                                                                                                                      |

|                                                                                                                      |                                                                                  |
|----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
| <b>náboj předný</b><br>Formula DC20LW, 9x100mm, cup cone ball bearings, IS 6 bolts                                   | <b>náboj zadný</b><br>Formula DC22LW 9x135mm, cup cone ball bearings, IS 6 bolts |
| <b>reťaz</b><br>Sram SX Eagle, 12s, Powerlock                                                                        | <b>kazeta</b><br>Sram PG-1230, 11-50T, 12s                                       |
| <b>drôty</b><br>CN round stainless steel                                                                             | <b>ráfiky</b><br>MDK-XP1 26 TLR, 23mm internal width, tubeless ready, 32 spokes  |
| <b>plášte</b><br>Kenda Booster 26x2.4 single compound 30TPI, wire bead                                               | <b>obj.c.</b><br>010.21127                                                       |
| <b>tlmič</b><br>X-Fusion 02PRO R, 210x55mm. Settings: low-speed rebound, air preload. 45x8mm top and bottom bushings | <b>predná brzda</b><br>Shimano M410, RT56 160mm IS 6 bolts rotor, resin pads     |
| <b>zadná brzda</b><br>Shimano M410, RT56 160mm IS 6 bolts rotor, resin pads                                          | <b>plášť zadný</b><br>Kenda Booster 26x2.4 single compound 30TPI, wire bead      |
| <b>nastavenia tlmiče</b><br>A-Tune light compression                                                                 | <b>prevodník</b><br>30T, steel, X-Sync                                           |
| <b>pätka k prehadzovačke</b><br>Mondraker M073                                                                       |                                                                                  |

Geometria

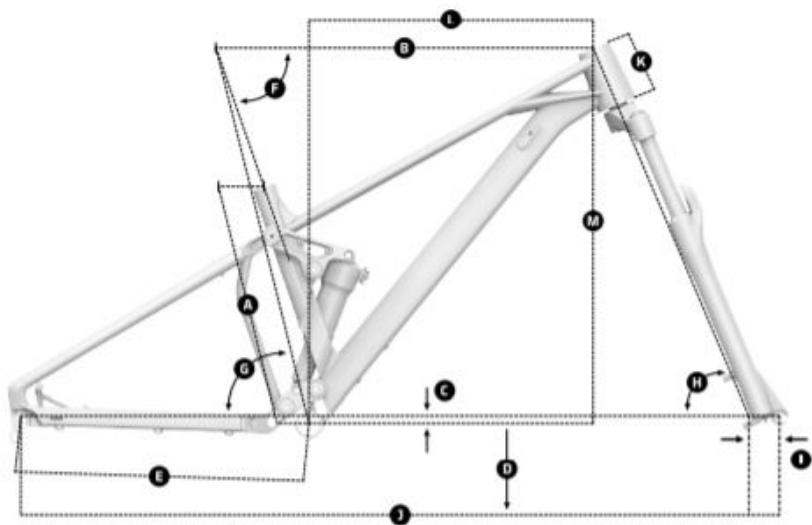

GEOMETRY

| Size                                | 26"     |
|-------------------------------------|---------|
| <b>A</b> Seat Tube Length           | 350mm   |
| <b>B</b> Top Tube Length            | 550mm   |
| <b>C</b> Bottom Bracket Drop        | -10 mm  |
| <b>D</b> Bottom Bracket Height      | 320 mm  |
| <b>E</b> Chainstay Legth            | 420 mm  |
| <b>F</b> Seat Tube Angle, Actual    | 71°     |
| <b>G</b> Seat Tube Angle, Effective | 76°     |
| <b>H</b> Head Tube Angle            | 67°     |
| <b>I</b> Fork Offset                | 41 mm   |
| <b>J</b> Wheelbase                  | 1105 mm |
| <b>K</b> Head Tube Length           | 90 mm   |
| <b>L</b> Reach                      | 415 mm  |
| <b>M</b> Stack                      | 545 mm  |