

SUMMUM 29, BLACK/WHITE/RED, 2021

obj. č.: 638984766



Odporúčaná cena

3.799,00 EUR

Technické špecifikácie

vyrábané veľkosti

S 400mm / M 400mm / L 400mm / XL 400mm

hmotnosť

17,9 Kg

rám

Summum 29 6061 Alloy Stealth Evo, hydroformed tubing, Zero suspension system, 200mm travel, Forward Geometry, alloy upper link with shock eyelet bearings, SuperBoost 12x157mm rear axle, 83mm BSA bottom bracket, MAX. capacity dual raw Enduro bearings, HHG internal cable routing, ISCG 05. Optional geometry kit: +1 / +-2headset cups

vidlica

Rockshox Boxxer Select RC 29, 200mm, DebonAir, 1-1/8 steerer tube, Boost 20x110mm axle, offset 56mm. Settings: low-speed compression, rebound, air preload

hlavové zloženie

Onoff Mercurium 1.5 ZS for 1-1/8 steerer tube, 41x30.15x7x45x45 ACB sealed bearings, geometry kit cups, external diameter 56mm

prehadzovačka

Sram X7, 9s, short cage, X-actuation 1:1

prešmykač

E.13 LG1 chain guide + DMB (Direct mount Bashguard) Gen 2 Stealth Idler, Aluminum hardware, adjustable/replaceable lower armature, polycarbonate, ISCG 05, adjustable upper slider

radenie

Sram trigger X5, 9s, X-actuation 1:1

brzdové páčky

Sram Code R, tool-free reach adjust

kluky

Race Face Chester, alloy, 165mm

stredové zloženie


Race Face BSA, 73mm

riadidlá

Onoff Sulfur 1.0 double butted 6061 alloy, rise: 20mm, width: 780mm, 9 backsweep, 5 upsweep, 31.8mm bar bore Onoff Desert, 1lock-on, 135mm, sizes: S/M L/XL

predstavec Onoff Krypton DH CNC Integrated FG, 25-30mm adjustable length, 31.8mm barbore, 6061 alloy, 2x6mm spacer	sedlovka SDG Micro I-Beam SP-751 Alloy, diameter 31.6mm, length 300mm, micro-adjustment
sedlo SDG I-Fly 2.0 I-Beam, high-density PU foam, Cordura sides	náboj předný MDK DA4371B-M20, Boost 20x110mm, IS 6 bolts
náboj zadný MDK DA4352B, 12x157mm, sealed bearings, IS 6 bolts	retěz Sram PC-951, 9s
kazeta Sram PG-950, 11-26T, 9s	drôty CN stainless steel
ráfiky MDK-DP1 29, 27mm internal width, 32 holes	plášte Michelin DH34 29x2.4, tubeless ready, Magi-X DH compound, double-reinforced DH shield casing, wire bead
obj.c. 010.21109	tlmič Fox Van RC Performance, 225x70mm. Settings: low-speed compression, low-speed rebound, spring preload. Trunnion top mount, 30x8mm bottom bushings
predná brzda Sram Code R, oversized 4-piston caliper, Centerline 200mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads	zadná brzda Sram Code R, oversized 4-piston caliper, Centerline 203mm IS 6 bolts one-piece rotor, steel-backed metal sintered pads
plášť zadný Michelin DH34 29x2.4, tubeless ready, Magi-X DH compound, double-reinforced DH shield casing, wire bead	nastavenia tlmiče Light compression, light rebound. Spring rate: S size 400 lbs, M size 400 lbs, L size 450 lbs, XL size 500 lbs
prevodník 36T	pätka k přehazovačce Mondraker M068

Geometria

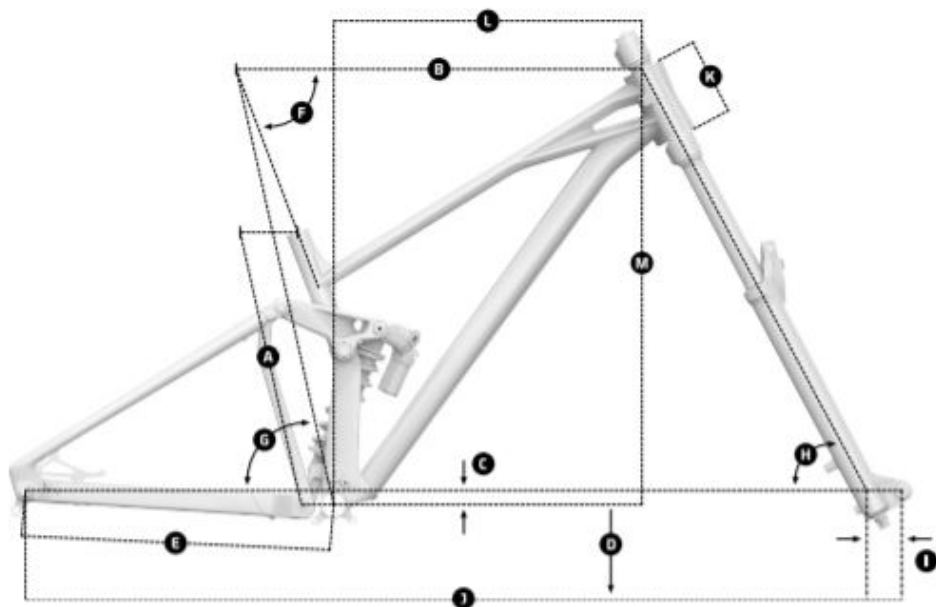

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	400 mm	400 mm	400 mm	400 mm
B Top Tube Length	573 mm	593 mm	618 mm	643 mm
C Bottom Bracket Drop	-20 mm	-20 mm	-20 mm	-20 mm
D Bottom Bracket Height	350 mm	350 mm	350 mm	350 mm
E Chainstay Legth	450 mm	450 mm	450 mm	450 mm
F Seat Tube Angle, Actual	69°	69°	69°	69°
G Seat Tube Angle, Effective	77°	77°	77°	77°
H Head Tube Angle	63.5°	63.5°	63.5°	63.5°
I Fork Offset	58 mm	58 mm	58 mm	58 mm
J Wheelbase	1260 mm	1270 mm	1295 mm	1320 mm
K Head Tube Length	112 mm	112 mm	112 mm	112 mm
L Reach	430 mm	450 mm	475 mm	500 mm
M Stack	632 mm	632 mm	632 mm	632 mm