

CHRONO, WHITE/ORANGE/BLUE, 2021

obj. č: 638984766



Odporúčaná cena

1.299,00 EUR

Akčná cena

1.129,00 EUR

Technické špecifikácie

vyrábané veľkosti

S 395mm / M 430mm / L 470mm / XL 520mm

hmotnosť

12,7 Kg

rám

Chrono 29 6061 Xtralite Alloy butted, XC Forward Geometry, 73mm BSA bottom bracket, tapered head tube, HHG Internal Cable Routing, Boost 12x148mm rear axle

vidlica

RockShox Judy Silver TK 29, 100mm, TurnKey, Solo Air, tapered steerer tube, 9x100mm axle, 30mm steel stanchions, 46mm offset. Settings: Poplock 2 pos remote compression (open/lock), rebound, air preload

hlavové zloženie

Onoff Saturn tapered for 1-1/8 to 1-1/2 head tube, ACB sealed bearings, top 41x30.2x7x45x45, bottom 51.9x40x8x45x45

prehadzovačka

Sram SX Eagle, Type 3 roller bearing clutch, cage lock, long cage, 1x12s, X-actuation 1:1

radenie

Sram Trigger SX Eagle, 12s, X-Actuation 1:1

brzdové páčky

Sram Level, tooled reach adjust, lever pivot bushings

kluky

Sram SX Eagle, Boost, DUB axle, Direct Mount chain ring, S size: 170mm, M/L/XL size: 175mm

stredové zloženie

Sram DUB BSA, sealed bearings, 73mm

riadidlá


Onoff Sulfur 0.2, double butted 6061 alloy, rise: 4.8mm, width: 740mm, 9 backsweep, 0 upsweep, 31.8mm barbare Onoff Twin, 1lock-on, 135mm

predstavec

Onoff Sulfur, 6061 T6 Alloy, 31.8mm barbare, rise: +/-7, length: sizes S/M: 60mm, size L: 80mm, size XL: 90mm

sedlovka Onoff Sulfur O-R, 6061 T6 Alloy, 3D forged, diameter 27.2mm, length 400mm	sedlo Mondraker XC Series, steel rail
náboj předný Formula DC20LW, 9x100mm, cup cone ball bearings, IS 6 bolts	náboj zadný Formula MST148S-4SB, Boost 12x148mm, sealed bearings, IS 6 bolts, MS freehub
reťaz Sram SX Eagle, 12s, Powerlock	kazeta Sram PG-1210, 11-50T, 12s
drôty CN round stainless steel	ráfiky MDK-XP1 29 TLR, 25mm internal width, tubeless ready, 32 spokes
plášte Kenda Slant Six 29x2.20, wire bead	obj.c. 011.21005
predná brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad	zadná brzda Sram Level, 2 piece caliper, Centerline 160mm IS 6 bolts one-piece rotor, steel-backed organic pad
prevodník 34T, steel, X-Sync 2	pätka k přehazovačce Mondraker M074

Geometria

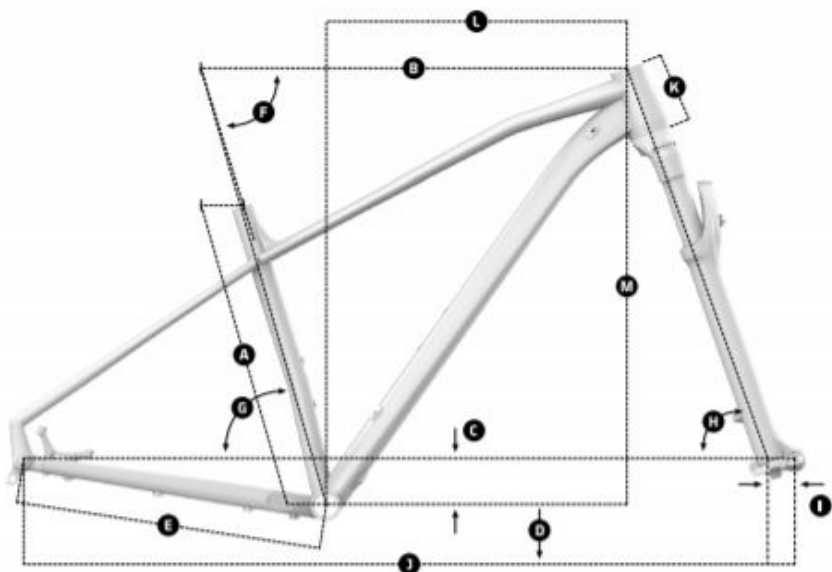

GEOMETRY

Size	S	M	L	XL
A Seat Tube Length	395 mm	430 mm	470 mm	520 mm
B Top Tube Length	590 mm	610 mm	630 mm	650 mm
C Bottom Bracket Drop	-65 mm	-65 mm	-65 mm	-65 mm
D Bottom Bracket Height	305 mm	305 mm	305 mm	305 mm
E Chainstay Legth	435 mm	435 mm	435 mm	435 mm
F Seat Tube Angle, Actual	72.5°	72.5°	72.5°	72.5°
G Seat Tube Angle, Effective	73.5°	73.5°	73.5°	73.5°
H Head Tube Angle	70°	70°	70°	70°
I Fork Offset	44 mm	44 mm	44 mm	44 mm
J Wheelbase	1087 mm	1107 mm	1127 mm	1148 mm
K Head Tube Length	100 mm	100 mm	110 mm	125 mm
L Reach	406 mm	426 mm	444 mm	460 mm
M Stack	618 mm	618 mm	628 mm	642 mm